



Standard Truck Build Out Configuration



Fully Equipped



Spacious Design for Easy Access and Maintenance



sprayMASTER[®] II

Epoxy Coating System

Turn-Key System for Cost-Effective, High Build Coating Rehabilitation

THE SPRAYMASTER[®] II IS A COMPLETELY SELF-CONTAINED INFRASTRUCTURE RENEWAL SYSTEM.

For manholes, pipes, culverts and tunnels, wet wells, junction boxes and non-round infrastructure.

BENEFITS

- Trenchless Application
- Small Construction Footprint
- No VOCs
- Prevents Corrosion
- Structural Enhancement



DESIGNED FOR

- Structure Guard[®]
- Structure Guard[®] Water

BASE SYSTEM

Truck Build:

- Truck Mounted 26' Aluminum Box




Separate Generator Room



55 Gallon Drum Heaters



Industrial Strength Cabinets & Storage

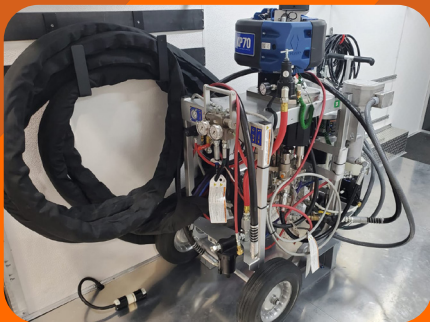

Plural Component Spray System

EQUIPMENT PACKAGE

- Graco XP70 2:1 Plural Component Sprayer Kit
- NexGen 25kw Generator/110 cfm Compressor Combo Unit
- Liquid Heater (3) with Brackets
- 50 ft. Heated Hose with Mounting Bracket
- Remote Manifold Carriage
- Pressure Monitor with Light
- Transfer Pump 5:1 (2)
- Drum Agitators (2)
- Spray Gun (1)
- 55-Gal Drum Heaters (3)
- Air Dryer

TRUCK BUILD ADD-ONS

- Dual Room with Lift Gate and Side Entry Door
- Covered/Insulated Walls and Ceiling
- Maple Butcher Block Countertop
- Roof Mounted Solar Charging Package
- Overhead Aluminum Storage Cabinets 36"W X 18"H X 12"D (2)
- LED Ceiling Mounted Lights (6)
- 110v Electrical Receptacle Outlets (4)
- 220v Electrical Receptacle Outlets (3)
- Single Drawer Double Doors 39"H X 30"W X 22"D (2)
- Heavy Duty 5 Drawer Toolbox 30"W X 39"H X 22"D
- Wireless Backup Camera
- Converter Charger with 25 ft. Shore Plug/Cord
- E Track Tie Down Brackets (4)
- Air Lines for Equipment
- Fire Extinguisher and CO₂ Detector
- Steel Plates on Floor
- A/C Unit with Heat Strip Mach 3
- LED Arrow Board
- Roof Strobes (4)
- Flood Lights (2)
- Tread Plate Walls